COUNTY OF ERIE

CHRIS COLLINS
COUNTY EXECUTIVE

DIVISION OF PURCHASE

TO: ALL USING DEPARTMENTS

FROM: Denyse Insalaco-Weatherbee, Buyer

DATE: December 15, 2011

SUBJECT: NEW CONTRACT FOR AUTO AND TRUCK BATTERIES FOR 2012

This is to advise you that there is a new contract for ***AUTO AND TRUCK BATTERIES.*** The vendor is El-Don Battery. The contract term is from January 1, 2012 through December 31, 2012. For your convenience I have listed the necessary information.

BID NO.; **212005-004**

CONTRACT TERM: **January 1, 2012 – December 31, 2012**

MATERIAL GROUP: **060**

VENDOR INFORMATION: **VENDOR #109700**
EL-DON BATTERY POST, INC.
4109 ST. FRANCIS DRIVE
HAMBURG, NY 14075
716-824-1987

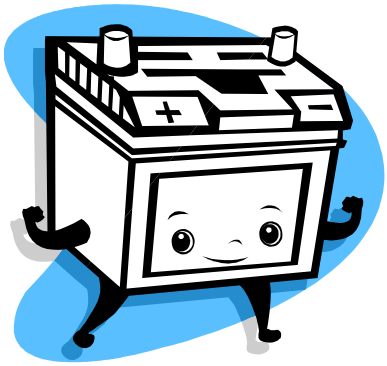

Diw
Att.

BCI GROUP NO.	BIDDERS PART NUMBER	COST	SCRAP	NET
1	901MF	$30.00	$10.00	**$20.00**
4	904MF	$60.00	$15.00	**$45.00**
7D	907D	$45.50	$15.00	**$30.50**
24	624MF	$64.74	$10.00	**$54.74**
31S	1031MF	$70.66	$15.00	**$55.66**
78	778MF	$70.58	$10.00	**$60.58**
65	665MF	$76.68	$10.00	**$66.68**
U1	8U1L	$19.45	$5.00	**$14.45**
4D	904D	$124.70	$30.00	**$94.70**
8D	708D	$141.83	$40.00	**$101.83**
64	664MF	$24.00	$10.00	**$14.00**
58	658MF	$39.30	$10.00	**$29.30**
75	675MF	$50.00	$10.00	**$40.00**
34	734MF	$62.42	$10.00	**$52.42**
4DLT	94DLT	$101.35	$20.00	**$81.35**
27	727MF	$57.00	$10.00	**$47.00**

DISCOUNT OFF LIST PRICE FOR ALL BATTERIES NOT SHOWN ON THIS BID:

50%

El-Don Battery Post, Inc.
4109 St. Francis Drive
Hamburg, NY 14075
716-824-1987
Fax: 896-0406
Effective Date: January 1, 2012

GROUP NO.	PART NO.	PERFORMANCE LEVEL				EC	List	WEIGHT (lbs)	MAXIMUM OVERALL DIMENSIONS						Core Value	WARR
		CCA	R.C.	REF. CA	20 HR CAP			WET	LENGTH in	LENGTH mm	WIDTH in	WIDTH mm	HEIGHT in	HEIGHT mm		Free / Pro Rata
12-VOLT INTIMIDATOR® — AGM — VALVE REGULATED																
34/78	9A78DT	775	120	955	55	126.98	253.95	42.5	10-3/4	273	6-7/8	175	8	203	1.0	24/85
34/78	9A78CDT	700	120	840	55	129.98	259.95	40.5	10-3/4	273	6-7/8	175	8	203	1.0	24/85
34	9A34	775	120	955	55	125.48	250.95	41	10-3/4	273	6-7/8	175	8	203	1.0	24/85
34R	9A34R	775	120	955	55	125.48	250.95	41	10-3/4	273	6-7/8	175	8	203	1.0	24/85
47	9A47	600	100	690	60	120.98	241.95	39	9-9/16	242	6-7/8	175	7-1/2	190	1.0	24/85
48	9A48	760	120	875	70	123.48	246.95	45.5	11	278	6-7/8	175	7-1/2	190	1.0	24/85
49	9A49	850	170	975	92	153.98	307.95	58.5	13-15/16	354	6-7/8	175	7-1/2	190	1.0	24/85
65	9A65	775	150	955	75	146.48	292.95	46	12	305	7-3/8	187	7-5/8	194	1.0	24/85
78	9A78	775	120	955	55	126.48	252.95	42.5	10-3/4	273	6-7/8	175	7-1/4	184	1.0	24/85
94R	9A94R	800	140	920	80	143.48	286.95	51.5	12-7/16	315	6-7/8	175	7-1/2	190	1.0	24/85
31	9A31	925	190	1060	100	177.48	354.95	63	13	330	6-3/4	171	9-1/2	241	1.5	18/36
31P	9A31P	925	190	1060	100	177.48	354.95	63	13	330	6-3/4	171	9-1/2	241	1.5	18/36
34M	9A34M	775	120	955	55	126.48	252.95	41.5	10-3/4	273	6-7/8	175	8-3/8	212	1.0	18/36

GROUP NO.	PART NO.	PERFORMANCE LEVEL			EC	List	WEIGHT (lbs)	MAXIMUM OVERALL DIMENSIONS						Core Value	Free Replace / Pro Rata
		CCA	R.C.	REF. CA			WET	LENGTH in	LENGTH mm	WIDTH in	WIDTH mm	HEIGHT in	HEIGHT mm		
12-VOLT ULTIMATE® ADVANCED GENERATION / A3™ TECHNOLOGY															
75/86	775DT	690	90	820	79.98	159.95	34.5	9-3/4	248	7	178	8-1/8	206	1.0	24/85
34/78	778DT	850	115	1020	90.48	180.95	41	10-3/4	273	6-7/8	175	8	203	1.0	24/85
24	724MF	725	120	890	79.48	158.95	41	10-3/4	273	6-3/4	171	9	229	1.0	24/85
24F	724FMF	725	120	890	79.48	158.95	41	10-3/4	273	6-3/4	171	9	229	1.0	24/85
25	725MF	625	95	775	69.48	138.95	35.5	9-3/4	248	6-7/8	175	8-7/8	225	1.0	24/85
27	727MF	840	140	1010	92.98	185.95	49.5	12-5/8	321	6-3/4	171	9	229	1.0	24/85
27F	727FMF	840	140	1010	94.49	188.98	49.5	12-5/8	321	6-3/4	171	9	229	1.0	24/85
34	734MF	850	115	1020	78.98	157.95	38.5	10-3/4	273	6-7/8	175	8	203	1.0	24/85
34R	734RMF	850	115	1020	78.98	157.95	38.5	10-3/4	273	6-7/8	175	8	203	1.0	24/85
35	735MF	625	95	775	69.48	138.95	35.5	9-3/4	248	6-7/8	175	8-7/8	225	1.0	24/85
47 (H5)	9AGM47	600	100	690	120.98	241.95	39	9-9/16	242	6-7/8	175	7-1/2	190	1.0	24/85
48 (H6)	9AGM48	760	120	875	122.98	245.95	45.5	11	278	6-7/8	175	7-1/2	190	1.0	24/85
48 (H6)	748MF	730	120	895	94.48	188.95	42.5	11	278	6-7/8	175	7-1/2	190	1.0	24/85
49 (H8)	9AGM49	850	170	975	153.98	307.95	58.5	13-15/16	354	6-7/8	175	7-1/2	190	1.0	24/85
65	765MF	750	140	885	86.48	172.95	45.5	12	305	7-3/8	187	7-5/8	194	1.0	24/85
75	775MF	690	90	820	74.48	148.95	34.5	9-3/4	248	7	178	7-1/4	184	1.0	24/85
78	778MF	850	115	1020	79.48	158.95	39	10-3/4	273	6-7/8	175	7-1/4	184	1.0	24/85
79	779MF	840	140	1000	105.48	210.95	43	12-1/16	307	7-1/16	179	7-3/8	188	1.0	24/85
86	786MF	690	90	775	75.48	150.95	34.5	9	229	6-7/8	175	8-1/8	206	1.0	24/85
94R (H7)	9AGM94R	800	140	920	143.48	286.95	51.5	12-7/16	315	6-7/8	175	7-1/2	190	1.0	24/85
12-VOLT PREMIUM / A3™ TECHNOLOGY															
75/86	675DT	650	85	800	73.48	146.95	33	9-3/4	248	7	178	8-1/8	206	1.0	18/70
	575DT	540	85	670	66.98	133.95	32							1.0	18/60
34/78	678DT	690	110	820	75.98	151.95	36.5	10-3/4	273	6-7/8	175	8	203	1.0	18/70
	578DT	550	90	660	66.98	133.95	33.5							1.0	18/60
24	624MF	675	115	850	72.48	144.95	40	10-3/4	273	6-3/4	171	9	229	1.0	18/70
	524MF	550	90	650	59.98	119.95	35.5							1.0	18/60
	424MF	460	70	575	54.98	109.95	32							1.0	12/50
24F	624FMF	675	115	850	72.48	144.95	40	10-3/4	273	6-3/4	171	9	229	1.0	18/70
	524FMF	550	90	650	59.98	119.95	35.5							1.0	18/60
	424FMF	460	70	575	54.98	109.95	32							1.0	12/50
25	525MF	550	90	675	63.98	127.95	33.5	9-3/4	248	6-7/8	175	8-7/8	225	1.0	18/60
26	526MF	540	80	665	60.48	120.95	29.5	8-3/4	222	6-3/4	171	8	203	1.0	18/60
	426MF	450	55	560	51.98	103.95	26							1.0	12/50
26R	526RMF	540	80	665	60.48	120.95	29.5	8-3/4	222	6-3/4	171	8	203	1.0	18/60
	426RMF	450	55	560	51.98	103.95	26							1.0	12/50
27	627MF	710	120	860	75.98	151.95	45.5	12	305	6-3/4	171	9	229	1.0	18/70
27F	627FMF	710	120	860	75.98	151.95	45.5	12-3/8	314	6-3/4	171	9	229	1.0	18/70
34	634MF	690	110	820	70.98	141.95	36.5	10-3/4	273	6-7/8	175	8	203	1.0	18/70
	534MF	550	90	690	61.48	122.95	33.5							1.0	18/60
34R	634RMF	690	110	820	70.98	141.95	36.5	10-3/4	273	6-7/8	175	8	203	1.0	18/70
35	535MF	550	90	675	63.98	127.95	33.5	9-3/4	248	6-7/8	175	8-7/8	225	1.0	18/60
36R	636RMF	650	120	800	75.98	151.95	42	10-1/4	260	7-1/4	184	8	203	1.0	18/70
40R (T6)	640RMF	650	105	810	81.98	163.95	37	11	278	6-7/8	175	6-7/8	175	1.0	18/70
41	641MF	650	100	800	87.98	175.95	38	11-9/16	293	6-7/8	175	6-7/8	175	1.0	18/70
42/58R	642/58R	580	85	725	69.48	138.95	31.5	10	254	7-1/4	184	6-7/8	175	1.0	18/70
	542/58R	500	75	630	63.48	126.95	28							1.0	18/60
42	642MF	475	70	590	65.98	131.95	29	9-9/16	242	6-7/8	175	6-7/8	175	1.0	18/70
45	545MF	485	65	600	61.48	122.95	30.5	9-3/8	238	5-1/2	140	9	229	1.0	18/60
47 (H5)	647MF	600	95	750	79.98	159.95	36.5	9-9/16	242	6-7/8	175	7-1/2	190	1.0	18/70
48 (H6)	648MF	700	120	875	89.98	179.95	42	11	278	6-7/8	175	7-1/2	190	1.0	18/70
49 (H8)	649MF	900	185	1080	115.48	230.95	56.5	13-15/16	354	6-7/8	175	7-1/2	190	1.0	18/70
50	650MF	600	108	750	93.98	187.95	43	13-3/8	340	5-3/8	136	8-7/8	225	1.0	18/70
51	551MF	475	70	590	69.48	118.95	28	9-3/8	238	5	127	8-3/4	222	1.0	18/60
51R	651RMF	500	75	600	65.98	131.95	29	9-3/8	238	5	127	8-3/4	222	1.0	18/70
	551RMF	475	70	590	58.48	116.95	28							1.0	18/60
55	655MF	570	90	705	74.98	149.95	29.5	8-3/4	222	6	152	8-1/2	216	1.0	18/70
58	658MF	580	85	725	68.48	136.95	31.5	10	254	7-1/4	184	7	178	1.0	18/70
	558MF	500	75	630	63.48	126.95	29							1.0	18/60
58R	658RMF	580	85	725	69.48	138.95	31.5	10	254	7-1/4	184	6-7/8	175	1.0	18/70
59	659MF	590	100	700	72.48	144.95	37	9-1/2	241	7-7/16	189	7-1/2	190	1.0	18/70

GROUP NO.	PART NO.	PERFORMANCE LEVEL			EC	List	WEIGHT (lbs)	MAXIMUM OVERALL DIMENSIONS						Core Value	Free Replace / Pro Rata
		CCA	R.C.	REF. CA				LENGTH		WIDTH		HEIGHT			
							WET	In	mm	In	mm	In	mm		
12-VOLT PREMIUM / A3™ TECHNOLOGY															
64	664MF	620	100	770	81.48	162.95	42	11-3/4	298	6-1/4	159	8-7/8	225	1.0	18/70
65	665MF	880	150	1040	86.98	173.95	45.5	12	305	7-3/8	187	7-5/8	194	1.0	18/70
	565MF	675	130	890	77.98	155.95	41							1.0	18/60
70	570MF	540	80	665	60.98	121.95	29.5	8-3/4	222	7	178	7-1/8	181	1.0	18/60
75	675MF	650	85	800	68.98	137.95	33	9-3/4	248	7	178	7-1/4	184	1.0	18/70
	575MF	540	85	670	60.98	121.95	32							1.0	18/60
78	678MF	690	110	820	71.48	142.95	36.5	10-3/4	273	6-7/8	175	7-1/4	184	1.0	18/70
	578MF	550	90	690	61.48	122.95	33.5							1.0	18/60
85	685MF	650	110	775	77.48	154.95	35.5	9	229	6-7/8	175	8-1/8	206	1.0	18/70
86	586MF	540	85	675	67.48	134.95	32	9	229	6-7/8	175	8-1/8	206	1.0	18/60
90 (T5)	690MF	600	90	745	77.98	155.95	33.5	9-9/16	242	6-7/8	175	6-7/8	175	1.0	18/70
91 (T6)	691MF	700	100	875	84.98	169.95	36.5	11	278	6-7/8	175	6-7/8	175	1.0	18/70
92 (T7)	692MF	650	130	780	137.48	274.95	37	12-1/2	317	6-7/8	175	6-7/8	175	1.0	18/70
93 (T8)	693MF	800	130	960	98.98	197.95	46.5	13-15/16	354	6-7/8	175	6-7/8	175	1.0	18/70
94R (H7)	694RMF	765	135	910	107.98	215.95	45	12-7/16	315	6-7/8	175	7-1/2	190	1.0	18/70
95R (H9)	695RMF	850	190	1020	171.48	342.95	64.5	15-1/2	394	6-7/8	175	7-1/2	190	1.0	18/70
96R	696RMF	600	90	745	77.98	155.95	33.5	9-9/16	242	6-7/8	175	6-7/8	175	1.0	18/70
97R (H5)	697RMF	600	95	750	85.48	170.95	36.5	9-9/16	242	6-7/8	175	7-1/2	190	1.0	18/70
101	6101MF	650	110	810	111.48	222.95	36	10-1/4	260	7-1/16	179	6-11/16	170	1.0	18/70
121R	6121RMF	540	80	665	67.48	134.95	29.5	8-1/4	210	6-15/16	177	8-1/8	206	1.0	18/70
124R	6124RMF	670	100	810	79.48	158.95	38	10-1/4	260	6-7/8	175	8-3/8	212	1.0	18/70
151R	5151RMF	330	55	440	51.48	102.95	19	7-1/4	184	4-15/16	125	8-3/4	222	1.0	18/60
Miata	8AMU1R	320	45	400	73.48	146.95	25	7-3/4	197	5-1/8	130	7-1/4	184	0.5	18/70
12-VOLT VALUE LINE MAINTENANCE-FREE															
75/86	VL75DT	475	60	590	51.48	102.95	32	9-3/4	248	7	178	8-1/8	206	1.0	6/55
34/78	VL78DT	525	80	650	61.98	123.95	32	10-3/4	273	6-7/8	175	8	203	1.0	6/55
24	VL24	440	70	550	51.98	103.95	32	10-3/4	273	6-3/4	171	9	229	1.0	6/55
24F	VL24F	440	70	550	51.98	103.95	32	10-3/4	273	6-3/4	171	9	229	1.0	6/55
26	VL26	440	55	550	47.98	95.95	26	8-3/4	222	6-3/4	171	8	203	1.0	6/55
26R	VL26R	440	55	550	47.98	95.95	26	8-3/4	222	6-3/4	171	8	203	1.0	6/55
58	VL58	440	70	550	52.48	104.95	27.5	10	254	7-1/4	184	7	178	1.0	6/55
65	VL65	650	120	865	72.98	145.95	38.5	12	305	7-3/8	187	7-5/8	194	1.0	6/55
31	VL31	650	130	800	80.48	160.95	49.5	13	330	6-3/4	171	9-1/2	241	1.5	6/30
31P	VL31P	650	130	800	80.48	160.95	49.5	13	330	6-3/4	171	9-1/2	241	1.5	6/30
12-VOLT VINTAGE VEHICLES & LIGHT COMMERCIAL															
3EE	403E	400	95	485	82.48	164.95	42	19-1/4	489	4-1/4	108	9	229	1.0	12/30
22NF	See page 2, Lawn Mower – Garden Tractor – Small Engine section.														
29NF	429NF	390	90	465	102.98	205.95	41	12-7/8	327	5-1/2	140	9	229	1.0	12/30
53	353	290	62	360	91.98	183.95	32.5	13	330	4-3/4	121	8-3/8	213	1.0	12/30
6-VOLT LIGHT TRUCK — OLDER MODEL PASSENGER CARS															
2E	402E	620	190	750	110.48	220.95	42	19-1/4	489	4	102	8-7/8	225	1.0	12/30
19L	319L	440	120	560	72.98	145.95	26	8-1/4	210	6-3/4	171	7-1/2	191	1.0	12/30
8-VOLT COMMERCIAL SERVICE															
1	801	520	102	650	77.48	154.95	31.5	8-7/8	225	6-3/4	171	8-7/8	225	1.0	12/30
6-VOLT HEAVY-DUTY COMMERCIAL SERVICE															
1	901MF	640	130	800	63.98	127.95	30	9	229	6-7/8	175	8-3/4	222	1.0	12/30
2	902	780	200	940	74.48	148.95	36.5	10-3/8	264	6-7/8	175	8-3/4	222	1.0	12/30
3EH	93EH	875	250	1035	80.98	161.95	47.5	19-1/4	489	4-1/4	108	10	254	1.0	12/30
4	904MF	975	250	1170	82.98	165.95	47	12-1/2	318	6-7/8	175	9-1/2	241	1.5	12/30
5D	905D	880	250	1100	94.48	188.95	50	13-3/8	340	7-1/8	181	9-1/4	235	1.5	12/30
12-VOLT HEAVY-DUTY COMMERCIAL SERVICE															
3ET	93ET	500	120	625	84.98	169.95	48	19-1/4	489	4-1/4	108	9-7/8	251	1.0	12/30
4D	904D	1050	290	1280	145.48	290.95	99.5	20-3/4	527	8-1/2	216	10-1/8	258	3.0	12/30
4DLT	94DLT	850	240	1005	124.98	249.95	80	20	508	8-1/8	206	8-1/8	206	2.0	12/30
8D	908D	1400	430	1700	185.48	370.95	130	20-3/4	527	11	279	10	254	4.0	12/30
	708D	1100	325	1340	155.48	310.95	117.5							4.0	12/30
17TF	917TF	530	140	630	132.48	264.95	58.5	17	432	6-7/8	175	8	203	1.5	12/30
28	928MF	550	100	685	99.48	198.95	41.5	10-1/4	260	6-3/4	171	9-1/2	241	1.0	12/30
30H	930H	650	150	800	84.48	168.95	51	13	330	6-3/4	171	9-1/2	241	1.5	12/30
31	1231MF	1000	185	1190	106.98	213.95	58	13	330	6-3/4	171	9-1/2	241	1.5	18/30
	1131MF	950	175	1140	94.98	189.95	56.5							1.5	18/30
	1031MF	760	170	910	87.48	174.95	54.5							1.5	18/30
	931MF	650	150	810	81.98	163.95	51							1.5	18/30
31P	1231PMF	1000	185	1190	106.98	213.95	58	13	330	6-3/4	171	9-1/2	241	1.5	18/30
	1131PMF	950	175	1140	94.98	189.95	56.5							1.5	18/30
	1031PMF	760	170	910	87.48	174.95	54.5							1.5	18/30
	931PMF	650	150	810	81.98	163.95	51							1.5	18/30
12-VOLT HEAVY-DUTY COMMERCIAL SEVERE SERVICE/DUAL PURPOSE															
31	7T31	730	190	940	112.48	224.95	62.5	13	330	6-3/4	171	9-1/2	241	1.5	18/30
31P	7T31P	730	190	940	112.48	224.95	62.5							1.5	18/30
31	DP31CS	700	185	875	102.98	205.95	57							1.5	18/30
12-VOLT HEAVY-DUTY COMMERCIAL — AGM — DEEP CYCLE / STARTING															
31	8A31	800	200	1000	182.48	364.95	69	13	330	6-3/4	171	9-1/2	241	1.5	12/36
12-VOLT LAWN MOWER — GARDEN TRACTOR — SMALL ENGINE CALCIUM MAINTENANCE-FREE															
U1	11U1L	350	—	410	44.48	88.95	19	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6/12
	10U1L	300	—	365	37.48	74.95	17							0.5	6/12
	8U1L	230	—	275	31.98	63.95	15.5							0.5	6/12
	7U1L	195	—	235	28.98	57.95	15							0.5	6/12
U1R	10U1R	300	—	365	37.48	74.95	17	7-3/4	197	5-1/8	130	7-1/4	184	0.5	6/12
	8U1R	230	—	275	31.98	63.95	15.5							0.5	6/12
	7U1R	195	—	235	28.98	57.95	15							0.5	6/12
	U1L = left front positive; U1R = right front positive (with terminal side of battery to front)														
22F	522FMF	425	65	540	62.98	125.95	29.5	9-3/8	238	6-3/4	171	8-1/4	210	1.0	6/12
22NF	322NF	360	58	430	54.98	109.95	29	9-3/8	238	5-1/2	140	9	229	0.5	6/12

1/1/12 EBP

GROUP NO.	PART NO.	PERFORMANCE LEVEL CCA	R.C.	REF. MCA	EC	List	WEIGHT (lbs) WET	LENGTH in	mm	WIDTH in	mm	HEIGHT in	mm	Core Value	Free / Pro Rata
12-VOLT MARINE / RV STARTING CALCIUM MAINTENANCE-FREE															
24	24M7	800	130	1000	$ 91.48	182.95	45	10-3/4	273	6-3/4	171	9-3/8	238	1.0	12/24
	24M6	675	115	820	$ 74.98	149.95	40							1.0	12/24
	24M5	550	90	650	$ 61.48	122.95	35.5							1.0	12/24
	24M4	460	70	575	$ 55.98	111.95	32							1.0	12/24
27	27M6	840	182	1050	$ 109.48	218.95	56	12-1/2	318	6-3/4	171	9-3/8	238	1.0	12/24
GROUP NO.	PART NO.	CCA	REF. MCA	MINS @ 23 A	MINS @ 25 A		20 HR CAP / WEIGHT WET	LENGTH in	mm	WIDTH in	mm	HEIGHT in	mm	Core Value	Free / Pro Rata
12-VOLT MARINE / RV DUAL PURPOSE STARTING / CYCLE SERVICE															
24	DP24	550	685	140	120	74.98	149.95	65 / 42		10-3/4	273	6-3/4	171	9-3/8	238	1.0	12/24
27	DP27	650	810	175	150	85.98	171.95	80 / 49		12-1/2	318	6-3/4	171	9-3/8	238	1.0	12/24
31	DP31DT	700	875	205	185	108.98	217.95	100 / 57		13	330	6-3/4	171	9-1/2	241	1.5	12/24
12-VOLT MARINE / RV DEEP CYCLE SERVICE															
24	DC24	500	625	150	130	85.48	170.95	75 / 45		10-3/4	273	6-3/4	171	9-3/8	238	1.0	12/24
27	DC27	575	715	200	175	98.48	196.95	90 / 53		12-1/2	318	6-3/4	171	9-3/8	238	1.0	12/24
31	DC31DT	650	810	225	185	114.48	228.95	105 / 59		13	330	6-3/4	171	9-1/2	241	1.5	12/24
Note: The three "DC" deep cycle part numbers above include double insulated glass mat separators.															
GROUP NO.	PART NO.	CCA	REF. MCA	8 HR CAP	6 HR CAP		WEIGHT (lbs) WET	LENGTH in	mm	WIDTH in	mm	HEIGHT in	mm	Core Value	Free / Pro Rata
8-VOLT MARINE AND INDUSTRIAL															
981	8V195	980	1170	170	166	205.95	411.95	90		20-3/4	527	7-1/4	184	10-5/8	270	2.0	6/24
983	819	510	610	167	158	293.98	587.95	119		24-1/2	622	7-1/2	191	10-1/2	267	3.0	6/24
984	821	530	635	187	177	328.48	656.95	135		27-1/2	699	7-1/2	191	10-1/2	267	3.0	6/24
985	825	730	870	224	212	390.48	780.95	160		26-7/8	683	8-1/2	216	11-3/4	298	4.0	6/24
GROUP NO.	PART NO.	CCA	RES. CAP.		20 HR CAP		WEIGHT (lbs) WET	LENGTH in	mm	WIDTH in	mm	HEIGHT in	mm	Core Value	Free / Pro Rata
ORDNANCE															
2HN 4HN	See page 4, Dry Charged Batteries section														
6TL	6TMF	750	230		120	167.48	334.95	73		11-1/4	286	10-1/2	267	9	229	2.0	6/24
GROUP NO.	PART NO.	20 HR CAP	6 HR CAP		MINS @ 75 A		WEIGHT (lbs) WET	LENGTH in	mm	WIDTH in	mm	HEIGHT in	mm	Core Value	Free / Pro Rata
6-VOLT FLOOR SCRUBBER AND SWEEPER															
901	9C11	250	210		130	157.48	314.95	73		11-3/4	298	7	178	11-1/2	292	1.5	6/12
	8C11	235	190		120	139.98	279.95	66.5								1.5	6/12
902	8C6V	330	270		170	196.48	392.95	97.5		11-3/4	298	7	178	14-3/8	365	2.0	6/12
903	8L16	370	295		190	213.98	427.95	113		11-3/4	298	7	178	16-1/2	419	2.5	6/12
12-VOLT FLOOR SCRUBBER AND SWEEPER															
921	9C12	228	180		115	257.98	515.95	127		15-1/2	394	7	178	14-1/4	362	3.0	6/12
	8C12	195	160		90	227.98	455.95	116								3.0	6/12
GROUP NO.	PART NO.	20 HR CAP	5 HR CAP	MINS. DISCHARGED @ 75 A	56 A		25 A / WEIGHT WET	LENGTH in	mm	WIDTH in	mm	HEIGHT in	mm	Core Value	Free / Pro Rata
GOLF CAR — EV — MOTIVE POWER — DEEP CYCLE SERVICE															
GC2	GC25	235	188	132	—	121.98	243.95	488	68	10-1/4	260	7-1/8	181	10-7/8	276	1.5	6/12
	GC15	230	174	120	—	113.98	227.95	448	64							1.5	6/12
	GC10	215	157	105	—	102.98	205.95	395	60.5							1.5	6/12
GC2H	GC45	255	203	145	—	150.98	301.95	530	77	10-1/4	260	7-1/8	181	11-7/8	302	1.5	6/12
GC8	GC8V	165	130	85	121	129.98	259.95	318	68	10-1/4	260	7-1/8	181	11-1/8	283	1.5	6/12
	GC12V	155	—	77	110	209.48	418.95	292	90	13-1/8	333	7-1/16	179	11-3/8	289	1.5	6/12
GROUP NO.	PART NO.	CCA		RES. CAP.	REF. CA		WEIGHT (lbs) WET	LENGTH in	mm	WIDTH in	mm	HEIGHT in	mm	Core Value	Free / Pro Rata
12-VOLT GOLF CAR STARTING BATTERY															
For gas engine golf cars with T881 terminal:															
24/26	426G	450		55	560	55.98	111.95	26		8-3/4	222	6-3/4	171	8	203	1.0	6/12
GROUP NO.	PART NO.	CCA	REF. MCA	RES. CAP.	MINS @ 25 A		20 HR CAP / WEIGHT WET	LENGTH in	mm	WIDTH in	mm	HEIGHT in	mm	Core Value	Free / Pro Rata
AGM VALVE REGULATED															
U1	8AU1	200	240	48	54	64.48	128.95	32	24	7-3/4	197	5-1/8	130	7-1/4	184	0.5	3/6
	8AU1H	200	240	48	54	64.98	129.95	32	24	8-5/16	211	5-1/8	130	7-1/4	184	0.5	3/6
22NF	8A22NF	350	420	85	95	106.98	213.95	55	38.5	9-3/8	238	5-1/2	140	9-1/4	235	0.5	3/6
24M	8A24M	525	800	135	145	142.48	284.95	79	53	10-7/8	276	6-3/4	171	9-7/8	251	1.0	12/36
24	8A24	525	800	135	145	142.48	284.95	79	53	10-7/8	276	6-3/4	171	9-7/8	251	1.0	12/36
	8A24NH	525	800	135	145	142.48	284.95	79	53	10-1/4	260	6-3/4	171	9-7/8	251	1.0	12/36
27M	8A27M	580	900	175	185	167.98	335.95	92	63	12-3/4	324	6-3/4	171	9-7/8	251	1.0	12/36
27	8A27	580	900	175	185	167.98	335.95	92	63	12-3/4	324	6-3/4	171	9-7/8	251	1.0	12/36
31M	8A31DTM	800	1000	200	210	185.98	371.95	105	69	12-15/16	329	6-3/4	171	9-3/8	238	1.5	12/36
4D	8A4D	1110	1420	380	413	336.98	673.95	198	129	20-3/4	527	8-1/2	216	10	254	3.0	12/36
8D	8A8D	1450	1800	480	517	405.48	810.95	245	158	20-3/4	527	11	279	10	254	4.0	12/36
GC2	8AGC2	680	900	380	409	193.48	386.95	190	69.5	10-1/4	260	7-1/8	181	10-7/8	276	1.5	3/12
GEL VALVE REGULATED															
U1	8GU1	200	290	44	47	78.98	157.95	31.6	23.4	7-3/4	197	5-1/8	130	7-1/4	184	0.5	3/6
	8GU1H	200	290	44	47	79.48	158.95	31.6	23.4	8-5/16	211	5-1/8	130	7-1/4	184	0.5	3/6
22NF	8G22NF	210	300	77	82	124.48	248.95	51	37	9-3/8	238	5-1/2	140	9-1/4	235	0.5	3/6
24M	8G24M	410	575	132	140	160.48	320.95	73.6	52.5	10-7/8	276	6-3/4	171	9-7/8	251	1.0	12/60
24	8G24	335	470	132	140	160.48	320.95	73.6	52	10-7/8	276	6-3/4	171	9-7/8	251	1.0	12/60
	8G24NH	335	470	132	140	160.48	320.95	73.6	52	10-1/4	260	6-3/4	171	9-7/8	251	1.0	12/60
	8G24SS	335	470	132	140	165.48	330.95	73.6	52	10-1/4	260	6-3/4	171	8-1/4	210	1.0	12/60
27M	8G27M	505	700	160	170	193.48	386.95	88	63.2	12-3/4	324	6-3/4	171	9-7/8	251	1.0	12/60
27	8G27	400	550	160	170	193.48	386.95	88	62.7	12-3/4	324	6-3/4	171	9-7/8	251	1.0	12/60
	8G27/T876	400	550	160	170	193.48	386.95	88	62.7	12-3/4	324	6-3/4	171	9-1/4	235	1.0	12/60
30H	8G30H	450	640	180	190	208.98	417.95	97.6	69.5	12-15/16	329	6-3/4	171	9-3/4	248	1.5	12/60
31M	8G31DTM	550	780	180	190	211.48	422.95	97.6	70	12-15/16	329	6-3/4	171	9-3/8	238	1.5	12/60
31	8G31	450	640	180	190	207.48	414.95	97.6	69.5	12-15/16	329	6-3/4	171	9-3/8	238	1.5	12/60
34R	8G34R	300	420	90	96	128.98	257.95	60	41.5	10-3/16	259	6-5/8	169	7	178	1.0	12/60
	8G40C	225	325	59	63	113.48	226.95	40	31.7	7-3/4	197	6-5/8	168	6-7/8	175	0.5	3/6
4D	8G4D	970	1245	375	395	386.48	772.95	183	127	20-3/4	527	8-1/2	216	10	254	3.0	12/60
8D	8G8D	1150	1470	475	500	466.48	932.95	225	157	20-3/4	527	11	279	10	254	4.0	12/60
GC2	8GGC2	585	850	345	375	208.48	416.95	180	68.4	10-1/4	260	7-1/8	181	10-7/8	276	1.5	3/12
GC8	8G8VGC	400	575	250	270	217.98	435.95	140	69.5	10-1/4	260	7-1/8	181	10-7/8	276	1.5	3/12

1/1/12 EBP

GROUP NO.	PART NO.	PERFORMANCE LEVEL				EC	List	WEIGHT		LENGTH		WIDTH		HEIGHT		Core Value	Free / Pro Rata
		CCA	10 HR CAPACITY					KGS	LBS	In	mm	In	mm	In	mm		
POWER SPORTS AGM VALVE REGULATED																	
	ETX9	120	8			47.48	94.95	3.2	7.1	5-7/8	150	3-7/16	88	4-3/16	106	0.2	3/12
	ETX12	180	10			50.48	100.95	4.3	9.4	5-7/8	150	3-7/16	88	5-1/8	130	0.2	3/12
	ETX14	220	12			55.98	111.95	5.4	12	5-7/8	150	3-7/16	88	5-3/4	145	0.2	3/12
	ETX14L	220	12			55.98	111.95	5.4	12	5-7/8	150	3-7/16	88	5-3/4	145	0.2	3/12
	ETX15	220	14			53.48	106.95	5	11	5-1/4	134	3-1/2	90	6-9/16	166	0.2	3/12
	ETX15L	220	14			53.48	106.95	5	11	5-1/4	134	3-1/2	90	6-9/16	166	0.2	3/12
	ETX16	325	19			65.98	131.95	7.7	17	6-7/8	175	4	100	6-1/8	155	0.2	3/12
	ETX16L	325	19			65.98	131.95	7.7	17	6-7/8	175	4	100	6-1/8	155	0.2	3/12
	ETX18L	340	20			71.98	143.95	8.2	18	8-1/8	206	3-9/16	91	6-3/8	163	0.2	3/12
	ETX20L	310	17.5			66.98	133.95	7	15.5	6-7/8	175	3-7/16	88	6-1/8	155	0.2	3/12
	ETX30L	400	26			80.48	160.95	9.8	21.7	6-5/8	168	5-3/16	131	6-7/8	175	0.2	3/12
	ETX30LA	400	26			81.98	163.95	9.8	21.7	6-5/8	168	5-3/16	131	7-3/4	197	0.2	3/12
GROUP NO.	PART NO.	PERFORMANCE LEVEL			VOLTS			WEIGHT		LENGTH		WIDTH		HEIGHT		Core Value	Free / Pro Rata
		CCA	RES. CAP.	REF. CA				DRY		In	mm	In	mm	In	mm		
DRY CHARGED BATTERIES																	
24	624MFD	675	115	850	12	85.48	170.95	26		10-3/4	273	6-3/4	171	9	229	1.0	18/70
4D	904DY	1050	290	1280	12	152.48	304.95	58		20-3/4	527	8-1/2	216	10-1/8	258	3.0	12/30
8D	908DY	1400	430	1700	12	195.98	391.95	80		20-3/4	527	11	279	10	254	4.0	12/30
31	1231MFD	1000	185	1190	12	123.48	246.95	43		13	330	6-3/4	171	9-1/2	241	1.5	18/30
U1	8U1LD	230	—	275	12	32.98	65.95	10.5		7-3/4	197	5-1/8	130	7-1/4	184	0.5	6/12
U1R	8U1RD	230	—	275	12	32.98	65.95	10.5		7-3/4	197	5-1/8	130	7-1/4	184	0.5	6/12
GROUP NO.	PART NO.	PERFORMANCE LEVEL			VOLTS			WEIGHT		LENGTH		WIDTH		HEIGHT		Core Value	Free / Pro Rata
		CCA	RES. CAP.	20 HR CAP				DRY		In	mm	In	mm	In	mm		
DRY CHARGED ORDNANCE BATTERIES																	
2HN	2HND	400	75	45	12	101.48	202.95	25		10-1/4	260	5-1/4	133	9	229	1.0	6/24
4HN	4HND	235	28	21	24	80.98	161.95	27.5		10-1/4	260	5-1/4	133	9	229	1.0	6/24
6TL	6TMFD	750	230	120	12	172.98	345.95	52		11-1/4	286	10-1/2	267	9	229	2.0	6/24



B. Flag terminal w/ 3/8" diameter hole (T876)
C. 1/4" x 20 Copper Insert Terminal
F. Standing upright terminal w/ 3/8" diameter hole (T877)
G. Offset post w/ horizontal hole, stainless steel 5/16" bolt and hex nut (T881)
O. Offset post w/ vertical stainless steel 5/16" stud and hex nut (T872)
T. Heavy Duty L terminal w/ 3/8" diameter hole (T975)
U. Molded-in offset SAE post and vertical 5/16" NEG., 5/16" POS. stainless steel studs & hex nuts
V. Molded-in offset SAE post and vertical 5/16"
NEG., 5/16" POS. stainless steel studs
W. "L" type terminal w/ 5/16" diameter hole (T882)
X. 3/8" x 16 stainless steel stud posts

- All batteries are maintenance-free calcium grids except where noted
- All batteries manufactured in polypropylene cases and covers except where noted
- All batteries manufactured in black case and black cover except where noted
- All batteries, except Power Sports, have SAE automotive post unless noted
- Warranty is suggested months
- All weights are approximate weight
- MCA and CA ratings @ 32°F for comparison only
- All ratings except CCA and RC are "nominal"
- Ratings conform to B.C.I. specifications
- Dry = up to 10% reduced capacity

FOOTNOTES
2. Black cover / Gray case
4. Gray cover / Gray case
6. Black cover / Brown Case
7. Dark blue cover / Dark blue case
8. Dry charged batteries have black covers & white cases
11. Low maintenance-low antimony grids
12. Hybrid construction
13. Absorbed Glass Mat technology
14. Centerline terminal posts
15. Hard rubber, one-piece cover construction
16. Dual terminal universal design
17. Includes handle
18. Includes top adapter
19. Includes lifting ledges
20. Hard rubber, multi-cell cover construction
21. Anchor lock elements
22. Flush manifold vented cover
23. Flush manifold vented cover when shipped wet,standard cover when shipped dry
25. With individual vent caps
32. Available dry charged only
34. Ratings after 15 cycles
35. Deduct 15% from CCA and CA rating shown to allow for double insulation (glass mat)
36. Peak performance capacity
37. For height with adapter add 7/8" (22mm)
38. "Non-spillable" defined by DOT (Department of Transportation) definitions
39. "Non-spillable" defined by ICAO (International Civil Aviation Organization)
and IATA (International Air Transport Association) definitions
42. Height without adapter
43. Warranty is 12 months in deep cycle service
74. Shipped with 20mm adapter
75. Shipped with two (2) 17mm adapters
76. Shipped with 10mm adapter
78. Shipped with 22mm height adapter

El-Don Battery Post, Inc.
4109 St. Francis Drive
Hamburg, NY 14075
716-824-1987
Fax: 896-0406
Effective Date: January 1, 2012