# COUNTY OF ERIE

**MARK POLONCARZ**
**COUNTY EXECUTIVE**

## DIVISION OF PURCHASE

TO: ALL USING DEPARTMENTS

FROM: Denyse Insalaco-Weatherbee, Buyer

DATE: November 30, 2012

SUBJECT: CONTRACT EXTENSION FOR AUTO AND TRUCK BATTERIES FOR 2013

---

This is to advise you that the contract for ***AUTO AND TRUCK BATTERIES*** has been extended for another year. The vendor is El-Don Battery. The contract is good through December 31, 2013. For your convenience I have listed the necessary information.

**BID NO.;** **212005-004**

**CONTRACT TERM:** **January 1, 2012 – December 31, 2013**

**MATERIAL GROUP:** **060**

**VENDOR INFORMATION:** **VENDOR #109700**
**EL-DON BATTERY POST, INC.**
**4109 ST. FRANCIS DRIVE**
**HAMBURG, NY 14075**
**716-824-1987**

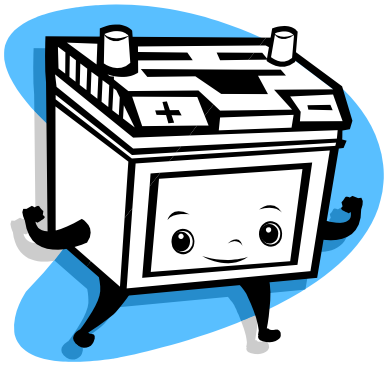

Diw
Att.

| BCI GROUP NO. | BIDDERS PART NUMBER | COST | SCRAP | NET |
|---|---|---|---|---|
| 1 | 901MF | $30.00 | $10.00 | **$20.00** |
| 4 | 904MF | $60.00 | $15.00 | **$45.00** |
| 7D | 907D | $45.50 | $15.00 | **$30.50** |
| 24 | 624MF | $64.74 | $10.00 | **$54.74** |
| 31S | 1031MF | $70.66 | $15.00 | **$55.66** |
| 78 | 778MF | $70.58 | $10.00 | **$60.58** |
| 65 | 665MF | $76.68 | $10.00 | **$66.68** |
| U1 | 8U1L | $19.45 | $5.00 | **$14.45** |
| 4D | 904D | $124.70 | $30.00 | **$94.70** |
| 8D | 708D | $141.83 | $40.00 | **$101.83** |
| 64 | 664MF | $24.00 | $10.00 | **$14.00** |
| 58 | 658MF | $39.30 | $10.00 | **$29.30** |
| 75 | 675MF | $50.00 | $10.00 | **$40.00** |
| 34 | 734MF | $62.42 | $10.00 | **$52.42** |
| 4DLT | 94DLT | $101.35 | $20.00 | **$81.35** |
| 27 | 727MF | $57.00 | $10.00 | **$47.00** |

DISCOUNT OFF LIST PRICE FOR ALL BATTERIES NOT SHOWN ON THIS BID:

**50%**

El-Don Battery Post, Inc.
4109 St. Francis Drive
Hamburg, NY 14075
716-824-1987
Fax: 896-0406
Effective Date: January 1, 2012

| GROUP NO. | PART NO. | PERFORMANCE LEVEL | | | | EC | List | WEIGHT (lbs) | MAXIMUM OVERALL DIMENSIONS | | | | | | Core Value | WARR |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | CCA | R.C. | REF. CA | 20 HR CAP | | | WET | LENGTH in | LENGTH mm | WIDTH in | WIDTH mm | HEIGHT in | HEIGHT mm | | Free / Pro Rata |
| **12-VOLT INTIMIDATOR® — AGM — VALVE REGULATED** | | | | | | | | | | | | | | | | |
| 34/78 | 9A78DT | 775 | 120 | 955 | 55 | 126.98 | 253.95 | 42.5 | 10-3/4 | 273 | 6-7/8 | 175 | 8 | 203 | 1.0 | 24/85 |
| 34/78 | 9A78CDT | 700 | 120 | 840 | 55 | 129.98 | 259.95 | 40.5 | 10-3/4 | 273 | 6-7/8 | 175 | 8 | 203 | 1.0 | 24/85 |
| 34 | 9A34 | 775 | 120 | 955 | 55 | 125.48 | 250.95 | 41 | 10-3/4 | 273 | 6-7/8 | 175 | 8 | 203 | 1.0 | 24/85 |
| 34R | 9A34R | 775 | 120 | 955 | 55 | 125.48 | 250.95 | 41 | 10-3/4 | 273 | 6-7/8 | 175 | 8 | 203 | 1.0 | 24/85 |
| 47 | 9A47 | 600 | 100 | 690 | 60 | 120.98 | 241.95 | 39 | 9-9/16 | 242 | 6-7/8 | 175 | 7-1/2 | 190 | 1.0 | 24/85 |
| 48 | 9A48 | 760 | 120 | 875 | 70 | 123.48 | 246.95 | 45.5 | 11 | 278 | 6-7/8 | 175 | 7-1/2 | 190 | 1.0 | 24/85 |
| 49 | 9A49 | 850 | 170 | 975 | 92 | 153.98 | 307.95 | 58.5 | 13-15/16 | 354 | 6-7/8 | 175 | 7-1/2 | 190 | 1.0 | 24/85 |
| 65 | 9A65 | 775 | 150 | 955 | 75 | 146.48 | 292.95 | 46 | 12 | 305 | 7-3/8 | 187 | 7-5/8 | 194 | 1.0 | 24/85 |
| 78 | 9A78 | 775 | 120 | 955 | 55 | 126.48 | 252.95 | 42.5 | 10-3/4 | 273 | 6-7/8 | 175 | 7-1/4 | 184 | 1.0 | 24/85 |
| 94R | 9A94R | 800 | 140 | 920 | 80 | 143.48 | 286.95 | 51.5 | 12-7/16 | 315 | 6-7/8 | 175 | 7-1/2 | 190 | 1.0 | 24/85 |
| 31 | 9A31 | 925 | 190 | 1060 | 100 | 177.48 | 354.95 | 63 | 13 | 330 | 6-3/4 | 171 | 9-1/2 | 241 | 1.5 | 18/36 |
| 31P | 9A31P | 925 | 190 | 1060 | 100 | 177.48 | 354.95 | 63 | 13 | 330 | 6-3/4 | 171 | 9-1/2 | 241 | 1.5 | 18/36 |
| 34M | 9A34M | 775 | 120 | 955 | 55 | 126.48 | 252.95 | 41.5 | 10-3/4 | 273 | 6-7/8 | 175 | 8-3/8 | 212 | 1.0 | 18/36 |
| GROUP NO. | PART NO. | PERFORMANCE LEVEL | | | | | | WEIGHT (lbs) | MAXIMUM OVERALL DIMENSIONS | | | | | | Core Value | Free Replace / Pro Rata |
| | | CCA | R.C. | REF. CA | | | | WET | LENGTH in | LENGTH mm | WIDTH in | WIDTH mm | HEIGHT in | HEIGHT mm | | |
| **12-VOLT ULTIMATE® ADVANCED GENERATION / A3™ TECHNOLOGY** | | | | | | | | | | | | | | | | |
| 75/86 | 775DT | 690 | 90 | 820 | | 79.98 | 159.95 | 34.5 | 9-3/4 | 248 | 7 | 178 | 8-1/8 | 206 | 1.0 | 24/85 |
| 34/78 | 778DT | 850 | 115 | 1020 | | 90.48 | 180.95 | 41 | 10-3/4 | 273 | 6-7/8 | 175 | 8 | 203 | 1.0 | 24/85 |
| 24 | 724MF | 725 | 120 | 890 | | 79.48 | 158.95 | 41 | 10-3/4 | 273 | 6-3/4 | 171 | 9 | 229 | 1.0 | 24/85 |
| 24F | 724FMF | 725 | 120 | 890 | | 79.48 | 158.95 | 41 | 10-3/4 | 273 | 6-3/4 | 171 | 9 | 229 | 1.0 | 24/85 |
| 25 | 725MF | 625 | 95 | 775 | | 69.48 | 138.95 | 35.5 | 9-3/4 | 248 | 6-7/8 | 175 | 8-7/8 | 225 | 1.0 | 24/85 |
| 27 | 727MF | 840 | 140 | 1010 | | 92.98 | 185.95 | 49.5 | 12-5/8 | 321 | 6-3/4 | 171 | 9 | 229 | 1.0 | 24/85 |
| 27F | 727FMF | 840 | 140 | 1010 | | 94.49 | 188.98 | 49.5 | 12-5/8 | 321 | 6-3/4 | 171 | 9 | 229 | 1.0 | 24/85 |
| 34 | 734MF | 850 | 115 | 1020 | | 78.98 | 157.95 | 38.5 | 10-3/4 | 273 | 6-7/8 | 175 | 8 | 203 | 1.0 | 24/85 |
| 34R | 734RMF | 850 | 115 | 1020 | | 78.98 | 157.95 | 38.5 | 10-3/4 | 273 | 6-7/8 | 175 | 8 | 203 | 1.0 | 24/85 |
| 35 | 735MF | 625 | 95 | 775 | | 69.48 | 138.95 | 35.5 | 9-3/4 | 248 | 6-7/8 | 175 | 8-7/8 | 225 | 1.0 | 24/85 |
| 47 (H5) | 9AGM47 | 600 | 100 | 690 | | 120.98 | 241.95 | 39 | 9-9/16 | 242 | 6-7/8 | 175 | 7-1/2 | 190 | 1.0 | 24/85 |
| 48 (H6) | 9AGM48 | 760 | 120 | 875 | | 122.98 | 245.95 | 45.5 | 11 | 278 | 6-7/8 | 175 | 7-1/2 | 190 | 1.0 | 24/85 |
| 48 (H6) | 748MF | 730 | 120 | 895 | | 94.48 | 188.95 | 42.5 | 11 | 278 | 6-7/8 | 175 | 7-1/2 | 190 | 1.0 | 24/85 |
| 49 (H8) | 9AGM49 | 850 | 170 | 975 | | 153.98 | 307.95 | 58.5 | 13-15/16 | 354 | 6-7/8 | 175 | 7-1/2 | 190 | 1.0 | 24/85 |
| 65 | 765MF | 750 | 140 | 885 | | 86.48 | 172.95 | 45.5 | 12 | 305 | 7-3/8 | 187 | 7-5/8 | 194 | 1.0 | 24/85 |
| 75 | 775MF | 690 | 90 | 820 | | 74.48 | 148.95 | 34.5 | 9-3/4 | 248 | 7 | 178 | 7-1/4 | 184 | 1.0 | 24/85 |
| 78 | 778MF | 850 | 115 | 1020 | | 79.48 | 158.95 | 39 | 10-3/4 | 273 | 6-7/8 | 175 | 7-1/4 | 184 | 1.0 | 24/85 |
| 79 | 779MF | 840 | 140 | 1000 | | 105.48 | 210.95 | 43 | 12-1/16 | 307 | 7-1/16 | 179 | 7-3/8 | 188 | 1.0 | 24/85 |
| 86 | 786MF | 690 | 90 | 775 | | 75.48 | 150.95 | 34.5 | 9 | 229 | 6-7/8 | 175 | 8-1/8 | 206 | 1.0 | 24/85 |
| 94R (H7) | 9AGM94R | 800 | 140 | 920 | | 143.48 | 286.95 | 51.5 | 12-7/16 | 315 | 6-7/8 | 175 | 7-1/2 | 190 | 1.0 | 24/85 |
| **12-VOLT PREMIUM / A3™ TECHNOLOGY** | | | | | | | | | | | | | | | | |
| 75/86 | 675DT | 650 | 85 | 800 | | 73.48 | 146.95 | 33 | 9-3/4 | 248 | 7 | 178 | 8-1/8 | 206 | 1.0 | 18/70 |
| | 575DT | 540 | 85 | 670 | | 66.98 | 133.95 | 32 | | | | | | | 1.0 | 18/60 |
| 34/78 | 678DT | 690 | 110 | 820 | | 75.98 | 151.95 | 36.5 | 10-3/4 | 273 | 6-7/8 | 175 | 8 | 203 | 1.0 | 18/70 |
| | 578DT | 550 | 90 | 660 | | 66.98 | 133.95 | 33.5 | | | | | | | 1.0 | 18/60 |
| 24 | 624MF | 675 | 115 | 850 | | 72.48 | 144.95 | 40 | 10-3/4 | 273 | 6-3/4 | 171 | 9 | 229 | 1.0 | 18/70 |
| | 524MF | 550 | 90 | 650 | | 59.98 | 119.95 | 35.5 | | | | | | | 1.0 | 18/60 |
| | 424MF | 460 | 70 | 575 | | 54.98 | 109.95 | 32 | | | | | | | 1.0 | 12/50 |
| 24F | 624FMF | 675 | 115 | 850 | | 72.48 | 144.95 | 40 | 10-3/4 | 273 | 6-3/4 | 171 | 9 | 229 | 1.0 | 18/70 |
| | 524FMF | 550 | 90 | 650 | | 59.98 | 119.95 | 35.5 | | | | | | | 1.0 | 18/60 |
| | 424FMF | 460 | 70 | 575 | | 54.98 | 109.95 | 32 | | | | | | | 1.0 | 12/50 |
| 25 | 525MF | 550 | 90 | 675 | | 63.98 | 127.95 | 33.5 | 9-3/4 | 248 | 6-7/8 | 175 | 8-7/8 | 225 | 1.0 | 18/60 |
| 26 | 526MF | 540 | 80 | 665 | | 60.48 | 120.95 | 29.5 | 8-3/4 | 222 | 6-3/4 | 171 | 8 | 203 | 1.0 | 18/60 |
| | 426MF | 450 | 55 | 560 | | 51.98 | 103.95 | 26 | | | | | | | 1.0 | 12/50 |
| 26R | 526RMF | 540 | 80 | 665 | | 60.48 | 120.95 | 29.5 | 8-3/4 | 222 | 6-3/4 | 171 | 8 | 203 | 1.0 | 18/60 |
| | 426RMF | 450 | 55 | 560 | | 51.98 | 103.95 | 26 | | | | | | | 1.0 | 12/50 |
| 27 | 627MF | 710 | 120 | 860 | | 75.98 | 151.95 | 45.5 | 12 | 305 | 6-3/4 | 171 | 9 | 229 | 1.0 | 18/70 |
| 27F | 627FMF | 710 | 120 | 860 | | 75.98 | 151.95 | 45.5 | 12-3/8 | 314 | 6-3/4 | 171 | 9 | 229 | 1.0 | 18/70 |
| 34 | 634MF | 690 | 110 | 820 | | 70.98 | 141.95 | 36.5 | 10-3/4 | 273 | 6-7/8 | 175 | 8 | 203 | 1.0 | 18/70 |
| | 534MF | 550 | 90 | 690 | | 61.48 | 122.95 | 33.5 | | | | | | | 1.0 | 18/60 |
| 34R | 634RMF | 690 | 110 | 820 | | 70.98 | 141.95 | 36.5 | 10-3/4 | 273 | 6-7/8 | 175 | 8 | 203 | 1.0 | 18/70 |
| 35 | 535MF | 550 | 90 | 675 | | 63.98 | 127.95 | 33.5 | 9-3/4 | 248 | 6-7/8 | 175 | 8-7/8 | 225 | 1.0 | 18/60 |
| 36R | 636RMF | 650 | 120 | 800 | | 75.98 | 151.95 | 42 | 10-1/4 | 260 | 7-1/4 | 184 | 8 | 203 | 1.0 | 18/70 |
| 40R (T6) | 640RMF | 650 | 105 | 810 | | 81.98 | 163.95 | 37 | 11 | 278 | 6-7/8 | 175 | 6-7/8 | 175 | 1.0 | 18/70 |
| 41 | 641MF | 650 | 100 | 800 | | 87.98 | 175.95 | 38 | 11-9/16 | 293 | 6-7/8 | 175 | 6-7/8 | 175 | 1.0 | 18/70 |
| 42/58R | 642/58R | 580 | 85 | 725 | | 69.48 | 138.95 | 31.5 | 10 | 254 | 7-1/4 | 184 | 6-7/8 | 175 | 1.0 | 18/70 |
| | 542/58R | 500 | 75 | 630 | | 63.48 | 126.95 | 28 | | | | | | | 1.0 | 18/60 |
| 42 | 642MF | 475 | 70 | 590 | | 65.98 | 131.95 | 29 | 9-9/16 | 242 | 6-7/8 | 175 | 6-7/8 | 175 | 1.0 | 18/70 |
| 45 | 545MF | 485 | 65 | 600 | | 61.48 | 122.95 | 30.5 | 9-3/8 | 238 | 5-1/2 | 140 | 9 | 229 | 1.0 | 18/60 |
| 47 (H5) | 647MF | 600 | 95 | 750 | | 79.98 | 159.95 | 36.5 | 9-9/16 | 242 | 6-7/8 | 175 | 7-1/2 | 190 | 1.0 | 18/70 |
| 48 (H6) | 648MF | 700 | 120 | 875 | | 89.98 | 179.95 | 42 | 11 | 278 | 6-7/8 | 175 | 7-1/2 | 190 | 1.0 | 18/70 |
| 49 (H8) | 649MF | 900 | 185 | 1080 | | 115.48 | 230.95 | 56.5 | 13-15/16 | 354 | 6-7/8 | 175 | 7-1/2 | 190 | 1.0 | 18/70 |
| 50 | 650MF | 600 | 108 | 750 | | 93.98 | 187.95 | 43 | 13-3/8 | 340 | 5-3/8 | 136 | 8-7/8 | 225 | 1.0 | 18/70 |
| 51 | 551MF | 475 | 70 | 590 | | 59.48 | 118.95 | 28 | 9-3/8 | 238 | 5 | 127 | 8-3/4 | 222 | 1.0 | 18/60 |
| 51R | 651RMF | 500 | 75 | 600 | | 65.98 | 131.95 | 29 | 9-3/8 | 238 | 5 | 127 | 8-3/4 | 222 | 1.0 | 18/70 |
| | 551RMF | 475 | 70 | 590 | | 58.48 | 116.95 | 28 | | | | | | | 1.0 | 18/60 |
| 55 | 655MF | 570 | 90 | 705 | | 74.98 | 149.95 | 29.5 | 8-3/4 | 222 | 6 | 152 | 8-1/2 | 216 | 1.0 | 18/70 |
| 58 | 658MF | 580 | 85 | 725 | | 68.48 | 136.95 | 31.5 | 10 | 254 | 7-1/4 | 184 | 7 | 178 | 1.0 | 18/70 |
| | 558MF | 500 | 75 | 630 | | 63.48 | 126.95 | 29 | | | | | | | 1.0 | 18/60 |
| 58R | 658RMF | 580 | 85 | 725 | | 69.48 | 138.95 | 31.5 | 10 | 254 | 7-1/4 | 184 | 6-7/8 | 175 | 1.0 | 18/70 |
| 59 | 659MF | 590 | 100 | 700 | | 72.48 | 144.95 | 37 | 9-1/2 | 241 | 7-7/16 | 189 | 7-1/2 | 190 | 1.0 | 18/70 |

| GROUP NO. | PART NO. | PERFORMANCE LEVEL | | | EC | List | WEIGHT (lbs) | MAXIMUM OVERALL DIMENSIONS | | | | | | Core Value | Free Replace / Pro Rata |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | CCA | R.C. | REF. CA | | | | LENGTH | | WIDTH | | HEIGHT | | | |
| | | | | | | | WET | In | mm | In | mm | In | mm | | |
| **12-VOLT PREMIUM / A3™ TECHNOLOGY** | | | | | | | | | | | | | | | |
| 64 | 664MF | 620 | 100 | 770 | 81.48 | 162.95 | 42 | 11-3/4 | 298 | 6-1/4 | 159 | 8-7/8 | 225 | 1.0 | 18/70 |
| 65 | 665MF | 880 | 150 | 1040 | 86.98 | 173.95 | 45.5 | 12 | 305 | 7-3/8 | 187 | 7-5/8 | 194 | 1.0 | 18/70 |
| | 565MF | 675 | 130 | 890 | 77.98 | 155.95 | 41 | | | | | | | 1.0 | 18/60 |
| 70 | 570MF | 540 | 80 | 665 | 60.98 | 121.95 | 29.5 | 8-3/4 | 222 | 7 | 178 | 7-1/8 | 181 | 1.0 | 18/60 |
| 75 | 675MF | 650 | 85 | 800 | 68.98 | 137.95 | 33 | 9-3/4 | 248 | 7 | 178 | 7-1/4 | 184 | 1.0 | 18/70 |
| | 575MF | 540 | 85 | 670 | 60.98 | 121.95 | 32 | | | | | | | 1.0 | 18/60 |
| 78 | 678MF | 690 | 110 | 820 | 71.48 | 142.95 | 36.5 | 10-3/4 | 273 | 6-7/8 | 175 | 7-1/4 | 184 | 1.0 | 18/70 |
| | 578MF | 550 | 90 | 690 | 61.48 | 122.95 | 33.5 | | | | | | | 1.0 | 18/60 |
| 85 | 685MF | 650 | 110 | 775 | 77.48 | 154.95 | 35.5 | 9 | 229 | 6-7/8 | 175 | 8-1/8 | 206 | 1.0 | 18/70 |
| 86 | 586MF | 540 | 85 | 675 | 67.48 | 134.95 | 32 | 9 | 229 | 6-7/8 | 175 | 8-1/8 | 206 | 1.0 | 18/60 |
| 90 (T5) | 690MF | 600 | 90 | 745 | 77.98 | 155.95 | 33.5 | 9-9/16 | 242 | 6-7/8 | 175 | 6-7/8 | 175 | 1.0 | 18/70 |
| 91 (T6) | 691MF | 700 | 100 | 875 | 84.98 | 169.95 | 36.5 | 11 | 278 | 6-7/8 | 175 | 6-7/8 | 175 | 1.0 | 18/70 |
| 92 (T7) | 692MF | 650 | 130 | 780 | 137.48 | 274.95 | 37 | 12-1/2 | 317 | 6-7/8 | 175 | 6-7/8 | 175 | 1.0 | 18/70 |
| 93 (T8) | 693MF | 800 | 130 | 960 | 98.98 | 197.95 | 46.5 | 13-15/16 | 354 | 6-7/8 | 175 | 6-7/8 | 175 | 1.0 | 18/70 |
| 94R (H7) | 694RMF | 765 | 135 | 910 | 107.98 | 215.95 | 45 | 12-7/16 | 315 | 6-7/8 | 175 | 7-1/2 | 190 | 1.0 | 18/70 |
| 95R (H9) | 695RMF | 850 | 190 | 1020 | 171.48 | 342.95 | 64.5 | 15-1/2 | 394 | 6-7/8 | 175 | 7-1/2 | 190 | 1.0 | 18/70 |
| 96R | 696RMF | 600 | 90 | 745 | 77.98 | 155.95 | 33.5 | 9-9/16 | 242 | 6-7/8 | 175 | 6-7/8 | 175 | 1.0 | 18/70 |
| 97R (H5) | 697RMF | 600 | 95 | 750 | 85.48 | 170.95 | 36.5 | 9-9/16 | 242 | 6-7/8 | 175 | 7-1/2 | 190 | 1.0 | 18/70 |
| 101 | 6101MF | 650 | 110 | 810 | 111.48 | 222.95 | 36 | 10-1/4 | 260 | 7-1/16 | 179 | 6-11/16 | 170 | 1.0 | 18/70 |
| 121R | 6121RMF | 540 | 80 | 665 | 67.48 | 134.95 | 29.5 | 8-1/4 | 210 | 6-15/16 | 177 | 8-1/8 | 206 | 1.0 | 18/70 |
| 124R | 6124RMF | 670 | 100 | 810 | 79.48 | 158.95 | 38 | 10-1/4 | 260 | 6-7/8 | 175 | 8-3/8 | 212 | 1.0 | 18/70 |
| 151R | 5151RMF | 330 | 55 | 440 | 51.48 | 102.95 | 19 | 7-1/4 | 184 | 4-15/16 | 125 | 8-3/4 | 222 | 1.0 | 18/60 |
| Miata | 8AMU1R | 320 | 45 | 400 | 73.48 | 146.95 | 25 | 7-3/4 | 197 | 5-1/8 | 130 | 7-1/4 | 184 | 0.5 | 18/70 |
| **12-VOLT VALUE LINE MAINTENANCE-FREE** | | | | | | | | | | | | | | | |
| 75/86 | VL75DT | 475 | 60 | 590 | 51.48 | 102.95 | 32 | 9-3/4 | 248 | 7 | 178 | 8-1/8 | 206 | 1.0 | 6/55 |
| 34/78 | VL78DT | 525 | 80 | 650 | 61.98 | 123.95 | 32 | 10-3/4 | 273 | 6-7/8 | 175 | 8 | 203 | 1.0 | 6/55 |
| 24 | VL24 | 440 | 70 | 550 | 51.98 | 103.95 | 32 | 10-3/4 | 273 | 6-3/4 | 171 | 9 | 229 | 1.0 | 6/55 |
| 24F | VL24F | 440 | 70 | 550 | 51.98 | 103.95 | 32 | 10-3/4 | 273 | 6-3/4 | 171 | 9 | 229 | 1.0 | 6/55 |
| 26 | VL26 | 440 | 55 | 550 | 47.98 | 95.95 | 26 | 8-3/4 | 222 | 6-3/4 | 171 | 8 | 203 | 1.0 | 6/55 |
| 26R | VL26R | 440 | 55 | 550 | 47.98 | 95.95 | 26 | 8-3/4 | 222 | 6-3/4 | 171 | 8 | 203 | 1.0 | 6/55 |
| 58 | VL58 | 440 | 70 | 550 | 52.48 | 104.95 | 27.5 | 10 | 254 | 7-1/4 | 184 | 7 | 178 | 1.0 | 6/55 |
| 65 | VL65 | 650 | 120 | 865 | 72.98 | 145.95 | 38.5 | 12 | 305 | 7-3/8 | 187 | 7-5/8 | 194 | 1.0 | 6/55 |
| 31 | VL31 | 650 | 130 | 800 | 80.48 | 160.95 | 49.5 | 13 | 330 | 6-3/4 | 171 | 9-1/2 | 241 | 1.5 | 6/30 |
| 31P | VL31P | 650 | 130 | 800 | 80.48 | 160.95 | 49.5 | 13 | 330 | 6-3/4 | 171 | 9-1/2 | 241 | 1.5 | 6/30 |
| **12-VOLT VINTAGE VEHICLES & LIGHT COMMERCIAL** | | | | | | | | | | | | | | | |
| 3EE | 403E | 400 | 95 | 485 | 82.48 | 164.95 | 42 | 19-1/4 | 489 | 4-1/4 | 108 | 9 | 229 | 1.0 | 12/30 |
| 22NF | See page 2, Lawn Mower – Garden Tractor – Small Engine section. | | | | | | | | | | | | | | |
| 29NF | 429NF | 390 | 90 | 465 | 102.98 | 205.95 | 41 | 12-7/8 | 327 | 5-1/2 | 140 | 9 | 229 | 1.0 | 12/30 |
| 53 | 353 | 290 | 62 | 360 | 91.98 | 183.95 | 32.5 | 13 | 330 | 4-3/4 | 121 | 8-3/8 | 213 | 1.0 | 12/30 |
| **6-VOLT LIGHT TRUCK — OLDER MODEL PASSENGER CARS** | | | | | | | | | | | | | | | |
| 2E | 402E | 620 | 190 | 750 | 110.48 | 220.95 | 42 | 19-1/4 | 489 | 4 | 102 | 8-7/8 | 225 | 1.0 | 12/30 |
| 19L | 319L | 440 | 120 | 560 | 72.98 | 145.95 | 26 | 8-1/4 | 210 | 6-3/4 | 171 | 7-1/2 | 191 | 1.0 | 12/30 |
| **8-VOLT COMMERCIAL SERVICE** | | | | | | | | | | | | | | | |
| 1 | 801 | 520 | 102 | 650 | 77.48 | 154.95 | 31.5 | 8-7/8 | 225 | 6-3/4 | 171 | 8-7/8 | 225 | 1.0 | 12/30 |
| **6-VOLT HEAVY-DUTY COMMERCIAL SERVICE** | | | | | | | | | | | | | | | |
| 1 | 901MF | 640 | 130 | 800 | 63.98 | 127.95 | 30 | 9 | 229 | 6-7/8 | 175 | 8-3/4 | 222 | 1.0 | 12/30 |
| 2 | 902 | 780 | 200 | 940 | 74.48 | 148.95 | 36.5 | 10-3/8 | 264 | 6-7/8 | 175 | 8-3/4 | 222 | 1.0 | 12/30 |
| 3EH | 93EH | 875 | 250 | 1035 | 80.98 | 161.95 | 47.5 | 19-1/4 | 489 | 4-1/4 | 108 | 10 | 254 | 1.0 | 12/30 |
| 4 | 904MF | 975 | 250 | 1170 | 82.98 | 165.95 | 47 | 12-1/2 | 318 | 6-7/8 | 175 | 9-1/2 | 241 | 1.5 | 12/30 |
| 5D | 905D | 880 | 250 | 1100 | 94.48 | 188.95 | 50 | 13-3/8 | 340 | 7-1/8 | 181 | 9-1/4 | 235 | 1.5 | 12/30 |
| **12-VOLT HEAVY-DUTY COMMERCIAL SERVICE** | | | | | | | | | | | | | | | |
| 3ET | 93ET | 500 | 120 | 625 | 84.98 | 169.95 | 48 | 19-1/4 | 489 | 4-1/4 | 108 | 9-7/8 | 251 | 1.0 | 12/30 |
| 4D | 904D | 1050 | 290 | 1280 | 145.48 | 290.95 | 99.5 | 20-3/4 | 527 | 8-1/2 | 216 | 10-1/8 | 258 | 3.0 | 12/30 |
| 4DLT | 94DLT | 850 | 240 | 1005 | 124.98 | 249.95 | 80 | 20 | 508 | 8-1/8 | 206 | 8-1/8 | 206 | 2.0 | 12/30 |
| 8D | 908D | 1400 | 430 | 1700 | 185.48 | 370.95 | 130 | 20-3/4 | 527 | 11 | 279 | 10 | 254 | 4.0 | 12/30 |
| | 708D | 1100 | 325 | 1340 | 155.48 | 310.95 | 117.5 | | | | | | | 4.0 | 12/30 |
| 17TF | 917TF | 530 | 140 | 630 | 132.48 | 264.95 | 58.5 | 17 | 432 | 6-7/8 | 175 | 8 | 203 | 1.5 | 12/30 |
| 28 | 928MF | 550 | 100 | 685 | 99.48 | 198.95 | 41.5 | 10-1/4 | 260 | 6-3/4 | 171 | 9-1/2 | 241 | 1.0 | 12/30 |
| 30H | 930H | 650 | 150 | 800 | 84.48 | 168.95 | 51 | 13 | 330 | 6-3/4 | 171 | 9-1/2 | 241 | 1.5 | 12/30 |
| 31 | 1231MF | 1000 | 185 | 1190 | 106.98 | 213.95 | 58 | 13 | 330 | 6-3/4 | 171 | 9-1/2 | 241 | 1.5 | 18/30 |
| | 1131MF | 950 | 175 | 1140 | 94.98 | 189.95 | 56.5 | | | | | | | 1.5 | 18/30 |
| | 1031MF | 760 | 170 | 910 | 87.48 | 174.95 | 54.5 | | | | | | | 1.5 | 18/30 |
| | 931MF | 650 | 150 | 810 | 81.98 | 163.95 | 51 | | | | | | | 1.5 | 18/30 |
| 31P | 1231PMF | 1000 | 185 | 1190 | 106.98 | 213.95 | 58 | 13 | 330 | 6-3/4 | 171 | 9-1/2 | 241 | 1.5 | 18/30 |
| | 1131PMF | 950 | 175 | 1140 | 94.98 | 189.95 | 56.5 | | | | | | | 1.5 | 18/30 |
| | 1031PMF | 760 | 170 | 910 | 87.48 | 174.95 | 54.5 | | | | | | | 1.5 | 18/30 |
| | 931PMF | 650 | 150 | 810 | 81.98 | 163.95 | 51 | | | | | | | 1.5 | 18/30 |
| **12-VOLT HEAVY-DUTY COMMERCIAL SEVERE SERVICE/DUAL PURPOSE** | | | | | | | | | | | | | | | |
| 31 | 7T31 | 730 | 190 | 940 | 112.48 | 224.95 | 62.5 | 13 | 330 | 6-3/4 | 171 | 9-1/2 | 241 | 1.5 | 18/30 |
| 31P | 7T31P | 730 | 190 | 940 | 112.48 | 224.95 | 62.5 | | | | | | | 1.5 | 18/30 |
| 31 | DP31CS | 700 | 185 | 875 | 102.98 | 205.95 | 57 | | | | | | | 1.5 | 18/30 |
| **12-VOLT HEAVY-DUTY COMMERCIAL — AGM — DEEP CYCLE / STARTING** | | | | | | | | | | | | | | | |
| 31 | 8A31 | 800 | 200 | 1000 | 182.48 | 364.95 | 69 | 13 | 330 | 6-3/4 | 171 | 9-1/2 | 241 | 1.5 | 12/36 |
| **12-VOLT LAWN MOWER — GARDEN TRACTOR — SMALL ENGINE CALCIUM MAINTENANCE-FREE** | | | | | | | | | | | | | | | |
| U1 | 11U1L | 350 | — | 410 | 44.48 | 88.95 | 19 | 7-3/4 | 197 | 5-1/8 | 130 | 7-1/4 | 184 | 0.5 | 6/12 |
| | 10U1L | 300 | — | 365 | 37.48 | 74.95 | 17 | | | | | | | 0.5 | 6/12 |
| | 8U1L | 230 | — | 275 | 31.98 | 63.95 | 15.5 | | | | | | | 0.5 | 6/12 |
| | 7U1L | 195 | — | 235 | 28.98 | 57.95 | 15 | | | | | | | 0.5 | 6/12 |
| U1R | 10U1R | 300 | — | 365 | 37.48 | 74.95 | 17 | 7-3/4 | 197 | 5-1/8 | 130 | 7-1/4 | 184 | 0.5 | 6/12 |
| | 8U1R | 230 | — | 275 | 31.98 | 63.95 | 15.5 | | | | | | | 0.5 | 6/12 |
| | 7U1R | 195 | — | 235 | 28.98 | 57.95 | 15 | | | | | | | 0.5 | 6/12 |
| | U1L = left front positive; U1R = right front positive (with terminal side of battery to front) | | | | | | | | | | | | | | |
| 22F | 522FMF | 425 | 65 | 540 | 62.98 | 125.95 | 29.5 | 9-3/8 | 238 | 6-3/4 | 171 | 8-1/4 | 210 | 1.0 | 6/12 |
| 22NF | 322NF | 360 | 58 | 430 | 54.98 | 109.95 | 29 | 9-3/8 | 238 | 5-1/2 | 140 | 9 | 229 | 0.5 | 6/12 |

1/1/12 EBP

| GROUP NO. | PART NO. | PERFORMANCE LEVEL CCA | R.C. | REF. MCA | EC | List | WEIGHT (lbs) WET | LENGTH in | mm | WIDTH in | mm | HEIGHT in | mm | Core Value | Free / Pro Rata |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **12-VOLT MARINE / RV STARTING CALCIUM MAINTENANCE-FREE** | | | | | | | | | | | | | | | |
| 24 | 24M7 | 800 | 130 | 1000 | $ 91.48 | 182.95 | 45 | 10-3/4 | 273 | 6-3/4 | 171 | 9-3/8 | 238 | 1.0 | 12/24 |
| | 24M6 | 675 | 115 | 820 | $ 74.98 | 149.95 | 40 | | | | | | | 1.0 | 12/24 |
| | 24M5 | 550 | 90 | 650 | $ 61.48 | 122.95 | 35.5 | | | | | | | 1.0 | 12/24 |
| | 24M4 | 460 | 70 | 575 | $ 55.98 | 111.95 | 32 | | | | | | | 1.0 | 12/24 |
| 27 | 27M6 | 840 | 182 | 1050 | $ 109.48 | 218.95 | 56 | 12-1/2 | 318 | 6-3/4 | 171 | 9-3/8 | 238 | 1.0 | 12/24 |
| GROUP NO. | PART NO. | CCA | REF. MCA | MINS @ 23 A | MINS @ 25 A | | 20 HR CAP / WEIGHT WET | LENGTH in | mm | WIDTH in | mm | HEIGHT in | mm | Core Value | Free / Pro Rata |
| **12-VOLT MARINE / RV DUAL PURPOSE STARTING / CYCLE SERVICE** | | | | | | | | | | | | | | | |
| 24 | DP24 | 550 | 685 | 140 | 120 | 74.98 | 149.95 | 65 / 42 | 10-3/4 | 273 | 6-3/4 | 171 | 9-3/8 | 238 | 1.0 | 12/24 |
| 27 | DP27 | 650 | 810 | 175 | 150 | 85.98 | 171.95 | 80 / 49 | 12-1/2 | 318 | 6-3/4 | 171 | 9-3/8 | 238 | 1.0 | 12/24 |
| 31 | DP31DT | 700 | 875 | 205 | 185 | 108.98 | 217.95 | 100 / 57 | 13 | 330 | 6-3/4 | 171 | 9-1/2 | 241 | 1.5 | 12/24 |
| **12-VOLT MARINE / RV DEEP CYCLE SERVICE** | | | | | | | | | | | | | | | |
| 24 | DC24 | 500 | 625 | 150 | 130 | 85.48 | 170.95 | 75 / 45 | 10-3/4 | 273 | 6-3/4 | 171 | 9-3/8 | 238 | 1.0 | 12/24 |
| 27 | DC27 | 575 | 715 | 200 | 175 | 98.48 | 196.95 | 90 / 53 | 12-1/2 | 318 | 6-3/4 | 171 | 9-3/8 | 238 | 1.0 | 12/24 |
| 31 | DC31DT | 650 | 810 | 225 | 185 | 114.48 | 228.95 | 105 / 59 | 13 | 330 | 6-3/4 | 171 | 9-1/2 | 241 | 1.5 | 12/24 |
| *Note: The three "DC" deep cycle part numbers above include double insulated glass mat separators.* | | | | | | | | | | | | | | | |
| GROUP NO. | PART NO. | CCA | REF. MCA | 8 HR CAP | 6 HR CAP | | WEIGHT (lbs) WET | LENGTH in | mm | WIDTH in | mm | HEIGHT in | mm | Core Value | Free / Pro Rata |
| **8-VOLT MARINE AND INDUSTRIAL** | | | | | | | | | | | | | | | |
| 981 | 8V195 | 980 | 1170 | 170 | 166 | 205.95 | 411.95 | 90 | 20-3/4 | 527 | 7-1/4 | 184 | 10-5/8 | 270 | 2.0 | 6/24 |
| 983 | 819 | 510 | 610 | 167 | 158 | 293.98 | 587.95 | 119 | 24-1/2 | 622 | 7-1/2 | 191 | 10-1/2 | 267 | 3.0 | 6/24 |
| 984 | 821 | 530 | 635 | 187 | 177 | 328.48 | 656.95 | 135 | 27-1/2 | 699 | 7-1/2 | 191 | 10-1/2 | 267 | 3.0 | 6/24 |
| 985 | 825 | 730 | 870 | 224 | 212 | 390.48 | 780.95 | 160 | 26-7/8 | 683 | 8-1/2 | 216 | 11-3/4 | 298 | 4.0 | 6/24 |
| GROUP NO. | PART NO. | CCA | RES. CAP. | | 20 HR CAP | | WEIGHT (lbs) WET | LENGTH in | mm | WIDTH in | mm | HEIGHT in | mm | Core Value | Free / Pro Rata |
| **ORDNANCE** | | | | | | | | | | | | | | | |
| 2HN 4HN | See page 4, Dry Charged Batteries section | | | | | | | | | | | | | | |
| 6TL | 6TMF | 750 | 230 | | 120 | 167.48 | 334.95 | 73 | 11-1/4 | 286 | 10-1/2 | 267 | 9 | 229 | 2.0 | 6/24 |
| GROUP NO. | PART NO. | 20 HR CAP | 6 HR CAP | | MINS @ 75 A | | WEIGHT (lbs) WET | LENGTH in | mm | WIDTH in | mm | HEIGHT in | mm | Core Value | Free / Pro Rata |
| **6-VOLT FLOOR SCRUBBER AND SWEEPER** | | | | | | | | | | | | | | | |
| 901 | 9C11 | 250 | 210 | | 130 | 157.48 | 314.95 | 73 | 11-3/4 | 298 | 7 | 178 | 11-1/2 | 292 | 1.5 | 6/12 |
| | 8C11 | 235 | 190 | | 120 | 139.98 | 279.95 | 66.5 | | | | | | | 1.5 | 6/12 |
| 902 | 8C6V | 330 | 270 | | 170 | 196.48 | 392.95 | 97.5 | 11-3/4 | 298 | 7 | 178 | 14-3/8 | 365 | 2.0 | 6/12 |
| 903 | 8L16 | 370 | 295 | | 190 | 213.98 | 427.95 | 113 | 11-3/4 | 298 | 7 | 178 | 16-1/2 | 419 | 2.5 | 6/12 |
| **12-VOLT FLOOR SCRUBBER AND SWEEPER** | | | | | | | | | | | | | | | |
| 921 | 9C12 | 228 | 180 | | 115 | 257.98 | 515.95 | 127 | 15-1/2 | 394 | 7 | 178 | 14-1/4 | 362 | 3.0 | 6/12 |
| | 8C12 | 195 | 160 | | 90 | 227.98 | 455.95 | 116 | | | | | | | 3.0 | 6/12 |
| GROUP NO. | PART NO. | 20 HR CAP | 5 HR CAP | MINS. DISCHARGED @ 75 A | 56 A | | 25 A / WEIGHT WET | LENGTH in | mm | WIDTH in | mm | HEIGHT in | mm | Core Value | Free / Pro Rata |
| **GOLF CAR — EV — MOTIVE POWER — DEEP CYCLE SERVICE** | | | | | | | | | | | | | | | |
| GC2 | GC25 | 235 | 188 | 132 | — | 121.98 | 243.95 | 488 / 68 | 10-1/4 | 260 | 7-1/8 | 181 | 10-7/8 | 276 | 1.5 | 6/12 |
| | GC15 | 230 | 174 | 120 | — | 113.98 | 227.95 | 448 / 64 | | | | | | | 1.5 | 6/12 |
| | GC10 | 215 | 157 | 105 | — | 102.98 | 205.95 | 395 / 60.5 | | | | | | | 1.5 | 6/12 |
| GC2H | GC45 | 255 | 203 | 145 | — | 150.98 | 301.95 | 530 / 77 | 10-1/4 | 260 | 7-1/8 | 181 | 11-7/8 | 302 | 1.5 | 6/12 |
| GC8 | GC8V | 165 | 130 | 85 | 121 | 129.98 | 259.95 | 318 / 68 | 10-1/4 | 260 | 7-1/8 | 181 | 11-1/8 | 283 | 1.5 | 6/12 |
| | GC12V | 155 | — | 77 | 110 | 209.48 | 418.95 | 292 / 90 | 13-1/8 | 333 | 7-1/16 | 179 | 11-3/8 | 289 | 1.5 | 6/12 |
| GROUP NO. | PART NO. | CCA | | RES. CAP. | REF. CA | | WEIGHT (lbs) WET | LENGTH in | mm | WIDTH in | mm | HEIGHT in | mm | Core Value | Free / Pro Rata |
| **12-VOLT GOLF CAR STARTING BATTERY** | | | | | | | | | | | | | | | |
| For gas engine golf cars with T881 terminal: | | | | | | | | | | | | | | | |
| 24/26 | 426G | 450 | | 55 | 560 | 55.98 | 111.95 | 26 | 8-3/4 | 222 | 6-3/4 | 171 | 8 | 203 | 1.0 | 6/12 |
| GROUP NO. | PART NO. | CCA | REF. MCA | RES. CAP. | MINS @ 25 A | | 20 HR CAP / WEIGHT WET | LENGTH in | mm | WIDTH in | mm | HEIGHT in | mm | Core Value | Free / Pro Rata |
| **AGM VALVE REGULATED** | | | | | | | | | | | | | | | |
| U1 | 8AU1 | 200 | 240 | 48 | 54 | 64.48 | 128.95 | 32 / 24 | 7-3/4 | 197 | 5-1/8 | 130 | 7-1/4 | 184 | 0.5 | 3/6 |
| | 8AU1H | 200 | 240 | 48 | 54 | 64.98 | 129.95 | 32 / 24 | 8-5/16 | 211 | 5-1/8 | 130 | 7-1/4 | 184 | 0.5 | 3/6 |
| 22NF | 8A22NF | 350 | 420 | 85 | 95 | 106.98 | 213.95 | 55 / 38.5 | 9-3/8 | 238 | 5-1/2 | 140 | 9-1/4 | 235 | 0.5 | 3/6 |
| 24M | 8A24M | 525 | 800 | 135 | 145 | 142.48 | 284.95 | 79 / 53 | 10-7/8 | 276 | 6-3/4 | 171 | 9-7/8 | 251 | 1.0 | 12/36 |
| 24 | 8A24 | 525 | 800 | 135 | 145 | 142.48 | 284.95 | 79 / 53 | 10-7/8 | 276 | 6-3/4 | 171 | 9-7/8 | 251 | 1.0 | 12/36 |
| | 8A24NH | 525 | 800 | 135 | 145 | 142.48 | 284.95 | 79 / 53 | 10-1/4 | 260 | 6-3/4 | 171 | 9-7/8 | 251 | 1.0 | 12/36 |
| 27M | 8A27M | 580 | 900 | 175 | 185 | 167.98 | 335.95 | 92 / 63 | 12-3/4 | 324 | 6-3/4 | 171 | 9-7/8 | 251 | 1.0 | 12/36 |
| 27 | 8A27 | 580 | 900 | 175 | 185 | 167.98 | 335.95 | 92 / 63 | 12-3/4 | 324 | 6-3/4 | 171 | 9-7/8 | 251 | 1.0 | 12/36 |
| 31M | 8A31DTM | 800 | 1000 | 200 | 210 | 185.98 | 371.95 | 105 / 69 | 12-15/16 | 329 | 6-3/4 | 171 | 9-3/8 | 238 | 1.5 | 12/36 |
| 4D | 8A4D | 1110 | 1420 | 380 | 413 | 336.98 | 673.95 | 198 / 129 | 20-3/4 | 527 | 8-1/2 | 216 | 10 | 254 | 3.0 | 12/36 |
| 8D | 8A8D | 1450 | 1800 | 480 | 517 | 405.48 | 810.95 | 245 / 158 | 20-3/4 | 527 | 11 | 279 | 10 | 254 | 4.0 | 12/36 |
| GC2 | 8AGC2 | 680 | 900 | 380 | 409 | 193.48 | 386.95 | 190 / 69.5 | 10-1/4 | 260 | 7-1/8 | 181 | 10-7/8 | 276 | 1.5 | 3/12 |
| **GEL VALVE REGULATED** | | | | | | | | | | | | | | | |
| U1 | 8GU1 | 200 | 290 | 44 | 47 | 78.98 | 157.95 | 31.6 / 23.4 | 7-3/4 | 197 | 5-1/8 | 130 | 7-1/4 | 184 | 0.5 | 3/6 |
| | 8GU1H | 200 | 290 | 44 | 47 | 79.48 | 158.95 | 31.6 / 23.4 | 8-5/16 | 211 | 5-1/8 | 130 | 7-1/4 | 184 | 0.5 | 3/6 |
| 22NF | 8G22NF | 210 | 300 | 77 | 82 | 124.48 | 248.95 | 51 / 37 | 9-3/8 | 238 | 5-1/2 | 140 | 9-1/4 | 235 | 0.5 | 3/6 |
| 24M | 8G24M | 410 | 575 | 132 | 140 | 160.48 | 320.95 | 73.6 / 52.5 | 10-7/8 | 276 | 6-3/4 | 171 | 9-7/8 | 251 | 1.0 | 12/60 |
| 24 | 8G24 | 335 | 470 | 132 | 140 | 160.48 | 320.95 | 73.6 / 52 | 10-7/8 | 276 | 6-3/4 | 171 | 9-7/8 | 251 | 1.0 | 12/60 |
| | 8G24NH | 335 | 470 | 132 | 140 | 160.48 | 320.95 | 73.6 / 52 | 10-1/4 | 260 | 6-3/4 | 171 | 9-7/8 | 251 | 1.0 | 12/60 |
| | 8G24SS | 335 | 470 | 132 | 140 | 165.48 | 330.95 | 73.6 / 52 | 10-1/4 | 260 | 6-3/4 | 171 | 8-1/4 | 210 | 1.0 | 12/60 |
| 27M | 8G27M | 505 | 700 | 160 | 170 | 193.48 | 386.95 | 88 / 63.2 | 12-3/4 | 324 | 6-3/4 | 171 | 9-7/8 | 251 | 1.0 | 12/60 |
| 27 | 8G27 | 400 | 550 | 160 | 170 | 193.48 | 386.95 | 88 / 62.7 | 12-3/4 | 324 | 6-3/4 | 171 | 9-7/8 | 251 | 1.0 | 12/60 |
| | 8G27/T876 | 400 | 550 | 160 | 170 | 193.48 | 386.95 | 88 / 62.7 | 12-3/4 | 324 | 6-3/4 | 171 | 9-1/4 | 235 | 1.0 | 12/60 |
| 30H | 8G30H | 450 | 640 | 180 | 190 | 208.98 | 417.95 | 97.6 / 69.5 | 12-15/16 | 329 | 6-3/4 | 171 | 9-3/4 | 248 | 1.5 | 12/60 |
| 31M | 8G31DTM | 550 | 780 | 180 | 190 | 211.48 | 422.95 | 97.6 / 70 | 12-15/16 | 329 | 6-3/4 | 171 | 9-3/8 | 238 | 1.5 | 12/60 |
| 31 | 8G31 | 450 | 640 | 180 | 190 | 207.48 | 414.95 | 97.6 / 69.5 | 12-15/16 | 329 | 6-3/4 | 171 | 9-3/8 | 238 | 1.5 | 12/60 |
| 34R | 8G34R | 300 | 420 | 90 | 96 | 128.98 | 257.95 | 60 / 41.5 | 10-3/16 | 259 | 6-5/8 | 169 | 7 | 178 | 1.0 | 12/60 |
| | 8G40C | 225 | 325 | 59 | 63 | 113.48 | 226.95 | 40 / 31.7 | 7-3/4 | 197 | 6-5/8 | 168 | 6-7/8 | 175 | 0.5 | 3/6 |
| 4D | 8G4D | 970 | 1245 | 375 | 395 | 386.48 | 772.95 | 183 / 127 | 20-3/4 | 527 | 8-1/2 | 216 | 10 | 254 | 3.0 | 12/60 |
| 8D | 8G8D | 1150 | 1470 | 475 | 500 | 466.48 | 932.95 | 225 / 157 | 20-3/4 | 527 | 11 | 279 | 10 | 254 | 4.0 | 12/60 |
| GC2 | 8GGC2 | 585 | 850 | 345 | 375 | 208.48 | 416.95 | 180 / 68.4 | 10-1/4 | 260 | 7-1/8 | 181 | 10-7/8 | 276 | 1.5 | 3/12 |
| GC8 | 8G8VGC | 400 | 575 | 250 | 270 | 217.98 | 435.95 | 140 / 69.5 | 10-1/4 | 260 | 7-1/8 | 181 | 10-7/8 | 276 | 1.5 | 3/12 |

1/1/12 EBP

| GROUP NO. | PART NO. | PERFORMANCE LEVEL | | EC | List | WEIGHT | | LENGTH | | WIDTH | | HEIGHT | | Core Value | Free / Pro Rata |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | CCA | 10 HR CAPACITY | | | KGS | LBS | In | mm | In | mm | In | mm | | |
| **POWER SPORTS AGM VALVE REGULATED** | | | | | | | | | | | | | | | |
| | ETX9 | 120 | 8 | 47.48 | 94.95 | 3.2 | 7.1 | 5-7/8 | 150 | 3-7/16 | 88 | 4-3/16 | 106 | 0.2 | 3/12 |
| | ETX12 | 180 | 10 | 50.48 | 100.95 | 4.3 | 9.4 | 5-7/8 | 150 | 3-7/16 | 88 | 5-1/8 | 130 | 0.2 | 3/12 |
| | ETX14 | 220 | 12 | 55.98 | 111.95 | 5.4 | 12 | 5-7/8 | 150 | 3-7/16 | 88 | 5-3/4 | 145 | 0.2 | 3/12 |
| | ETX14L | 220 | 12 | 55.98 | 111.95 | 5.4 | 12 | 5-7/8 | 150 | 3-7/16 | 88 | 5-3/4 | 145 | 0.2 | 3/12 |
| | ETX15 | 220 | 14 | 53.48 | 106.95 | 5 | 11 | 5-1/4 | 134 | 3-1/2 | 90 | 6-9/16 | 166 | 0.2 | 3/12 |
| | ETX15L | 220 | 14 | 53.48 | 106.95 | 5 | 11 | 5-1/4 | 134 | 3-1/2 | 90 | 6-9/16 | 166 | 0.2 | 3/12 |
| | ETX16 | 325 | 19 | 65.98 | 131.95 | 7.7 | 17 | 6-7/8 | 175 | 4 | 100 | 6-1/8 | 155 | 0.2 | 3/12 |
| | ETX16L | 325 | 19 | 65.98 | 131.95 | 7.7 | 17 | 6-7/8 | 175 | 4 | 100 | 6-1/8 | 155 | 0.2 | 3/12 |
| | ETX18L | 340 | 20 | 71.98 | 143.95 | 8.2 | 18 | 8-1/8 | 206 | 3-9/16 | 91 | 6-3/8 | 163 | 0.2 | 3/12 |
| | ETX20L | 310 | 17.5 | 66.98 | 133.95 | 7 | 15.5 | 6-7/8 | 175 | 3-7/16 | 88 | 6-1/8 | 155 | 0.2 | 3/12 |
| | ETX30L | 400 | 26 | 80.48 | 160.95 | 9.8 | 21.7 | 6-5/8 | 168 | 5-3/16 | 131 | 6-7/8 | 175 | 0.2 | 3/12 |
| | ETX30LA | 400 | 26 | 81.98 | 163.95 | 9.8 | 21.7 | 6-5/8 | 168 | 5-3/16 | 131 | 7-3/4 | 197 | 0.2 | 3/12 |

| GROUP NO. | PART NO. | PERFORMANCE LEVEL | | | VOLTS | | | WEIGHT | LENGTH | | WIDTH | | HEIGHT | | Core Value | Free / Pro Rata |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | CCA | RES. CAP. | REF. CA | | | | DRY | In | mm | In | mm | In | mm | | |
| **DRY CHARGED BATTERIES** | | | | | | | | | | | | | | | | |
| 24 | 624MFD | 675 | 115 | 850 | 12 | 85.48 | 170.95 | 26 | 10-3/4 | 273 | 6-3/4 | 171 | 9 | 229 | 1.0 | 18/70 |
| 4D | 904DY | 1050 | 290 | 1280 | 12 | 152.48 | 304.95 | 58 | 20-3/4 | 527 | 8-1/2 | 216 | 10-1/8 | 258 | 3.0 | 12/30 |
| 8D | 908DY | 1400 | 430 | 1700 | 12 | 195.98 | 391.95 | 80 | 20-3/4 | 527 | 11 | 279 | 10 | 254 | 4.0 | 12/30 |
| 31 | 1231MFD | 1000 | 185 | 1190 | 12 | 123.48 | 246.95 | 43 | 13 | 330 | 6-3/4 | 171 | 9-1/2 | 241 | 1.5 | 18/30 |
| U1 | 8U1LD | 230 | — | 275 | 12 | 32.98 | 65.95 | 10.5 | 7-3/4 | 197 | 5-1/8 | 130 | 7-1/4 | 184 | 0.5 | 6/12 |
| U1R | 8U1RD | 230 | — | 275 | 12 | 32.98 | 65.95 | 10.5 | 7-3/4 | 197 | 5-1/8 | 130 | 7-1/4 | 184 | 0.5 | 6/12 |

| GROUP NO. | PART NO. | PERFORMANCE LEVEL | | | VOLTS | | | WEIGHT | LENGTH | | WIDTH | | HEIGHT | | Core Value | Free / Pro Rata |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | CCA | RES. CAP. | 20 HR CAP | | | | DRY | In | mm | In | mm | In | mm | | |
| **DRY CHARGED ORDNANCE BATTERIES** | | | | | | | | | | | | | | | | |
| 2HN | 2HND | 400 | 75 | 45 | 12 | 101.48 | 202.95 | 25 | 10-1/4 | 260 | 5-1/4 | 133 | 9 | 229 | 1.0 | 6/24 |
| 4HN | 4HND | 235 | 28 | 21 | 24 | 80.98 | 161.95 | 27.5 | 10-1/4 | 260 | 5-1/4 | 133 | 9 | 229 | 1.0 | 6/24 |
| 6TL | 6TMFD | 750 | 230 | 120 | 12 | 172.98 | 345.95 | 52 | 11-1/4 | 286 | 10-1/2 | 267 | 9 | 229 | 2.0 | 6/24 |




B. Flag terminal w/ 3/8" diameter hole (T876)
C. 1/4" x 20 Copper Insert Terminal
F. Standing upright terminal w/ 3/8" diameter hole (T877)
G. Offset post w/ horizontal hole, stainless steel 5/16" bolt and hex nut (T881)
O. Offset post w/ vertical stainless steel 5/16" stud and hex nut (T872)
T. Heavy Duty L terminal w/ 3/8" diameter hole (T975)
U. Molded-in offset SAE post and vertical 5/16" NEG., 5/16" POS. stainless steel studs & hex nuts
V. Molded-in offset SAE post and vertical 5/16" NEG., 5/16" POS. stainless steel studs
W. "L" type terminal w/ 5/16" diameter hole (T882)
X. 3/8" x 16 stainless steel stud posts

- All batteries are maintenance-free calcium grids except where noted
- All batteries manufactured in polypropylene cases and covers except where noted
- All batteries manufactured in black case and black cover except where noted
- All batteries, except Power Sports, have SAE automotive post unless noted
- Warranty is suggested months
- All weights are approximate weight
- MCA and CA ratings @ 32°F for comparison only
- All ratings except CCA and RC are "nominal"
- Ratings conform to B.C.I. specifications
- Dry = up to 10% reduced capacity

FOOTNOTES

2. Black cover / Gray case
4. Gray cover / Gray case
6. Black cover / Brown Case
7. Dark blue cover / Dark blue case
8. Dry charged batteries have black covers & white cases
11. Low maintenance-low antimony grids
12. Hybrid construction
13. Absorbed Glass Mat technology
14. Centerline terminal posts
15. Hard rubber, one-piece cover construction
16. Dual terminal universal design
17. Includes handle
18. Includes top adapter
19. Includes lifting ledges
20. Hard rubber, multi-cell cover construction
21. Anchor lock elements
22. Flush manifold vented cover
23. Flush manifold vented cover when shipped wet,standard cover when shipped dry
25. With individual vent caps
32. Available dry charged only
34. Ratings after 15 cycles
35. Deduct 15% from CCA and CA rating shown to allow for double insulation (glass mat)
36. Peak performance capacity
37. For height with adapter add 7/8" (22mm)
38. "Non-spillable" defined by DOT (Department of Transportation) definitions
39. "Non-spillable" defined by ICAO (International Civil Aviation Organization) and IATA (International Air Transport Association) definitions
42. Height without adapter
43. Warranty is 12 months in deep cycle service
74. Shipped with 20mm adapter
75. Shipped with two (2) 17mm adapters
76. Shipped with 10mm adapter
78. Shipped with 22mm height adapter

**El-Don Battery Post, Inc.**
**4109 St. Francis Drive**
**Hamburg, NY 14075**
**716-824-1987**
**Fax: 896-0406**
**Effective Date: January 1, 2012**